



FOOTING CENTRES


Product Length	Footing Centres
1780mm	1380mm (Standard)
1240mm	840mm
1480mm	1080mm
2020mm	1620mm
2380mm	1980mm

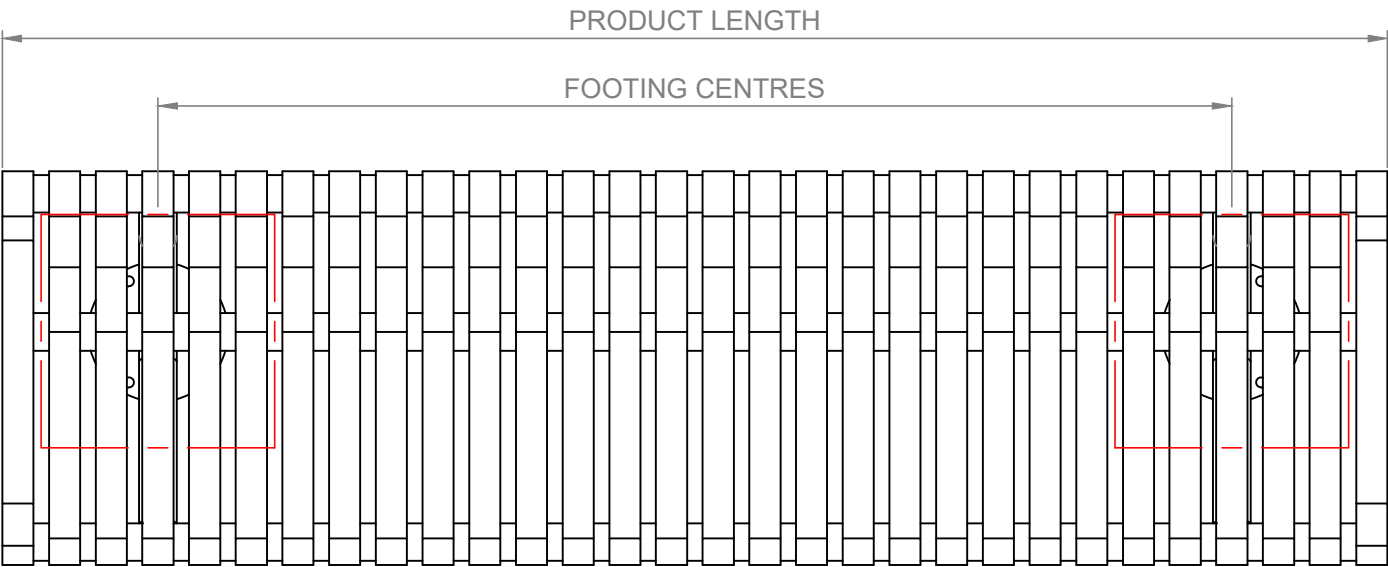

Top view

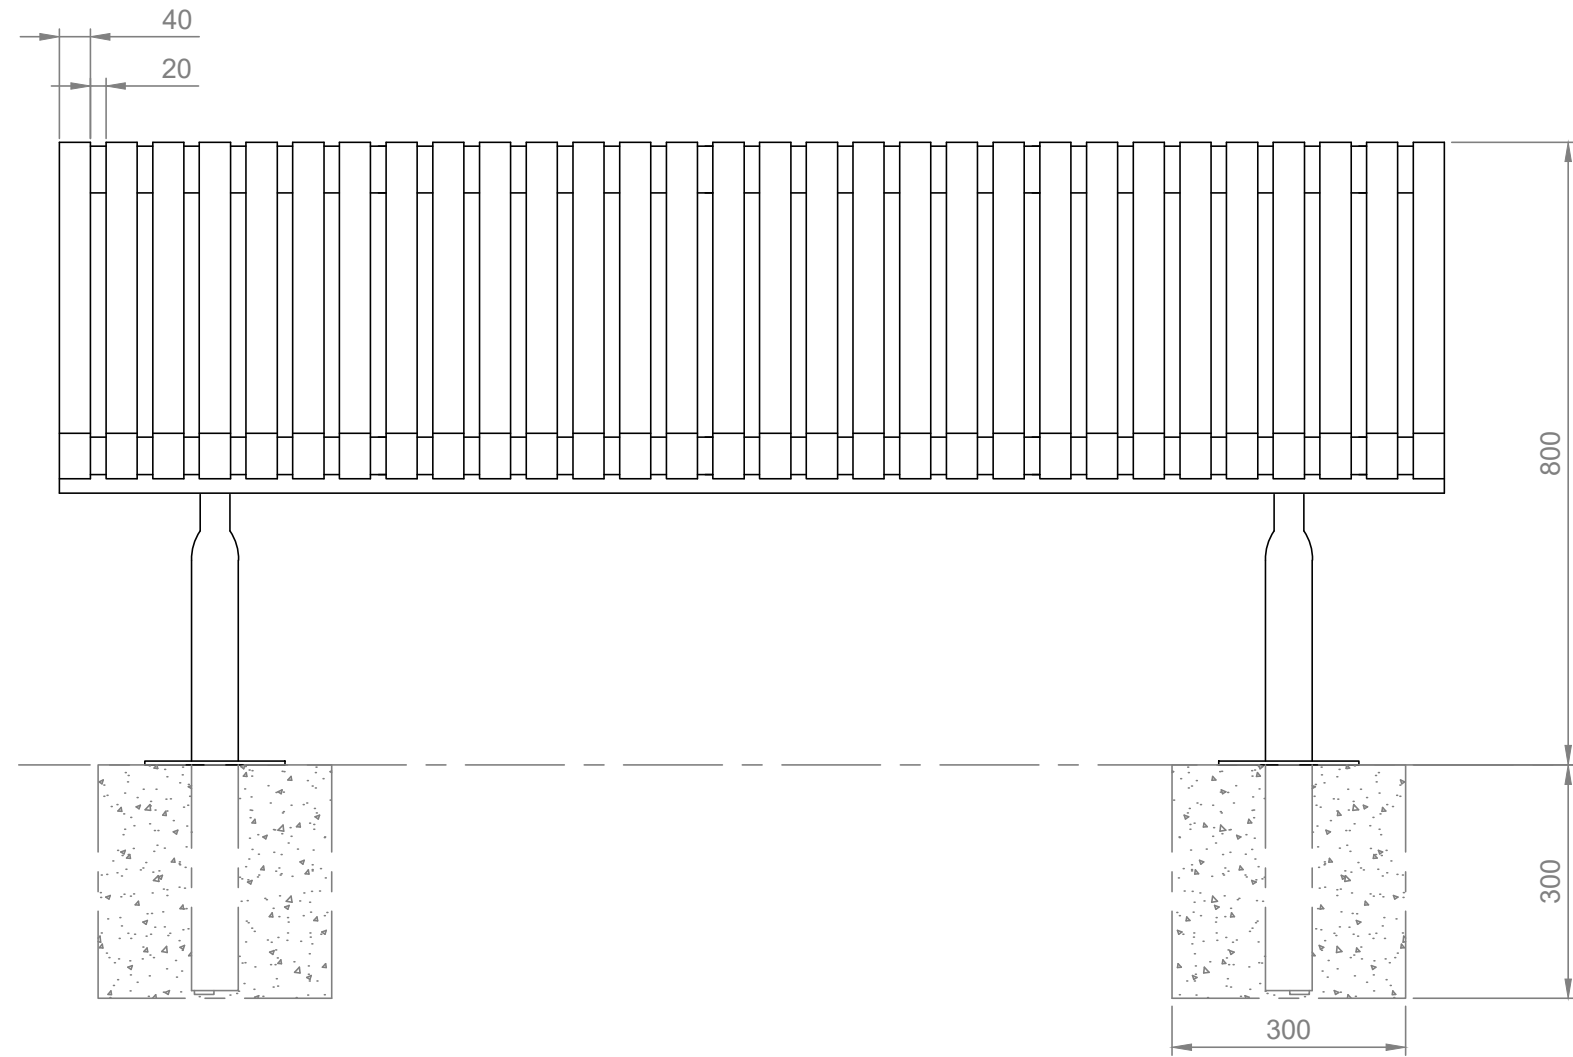

Front view

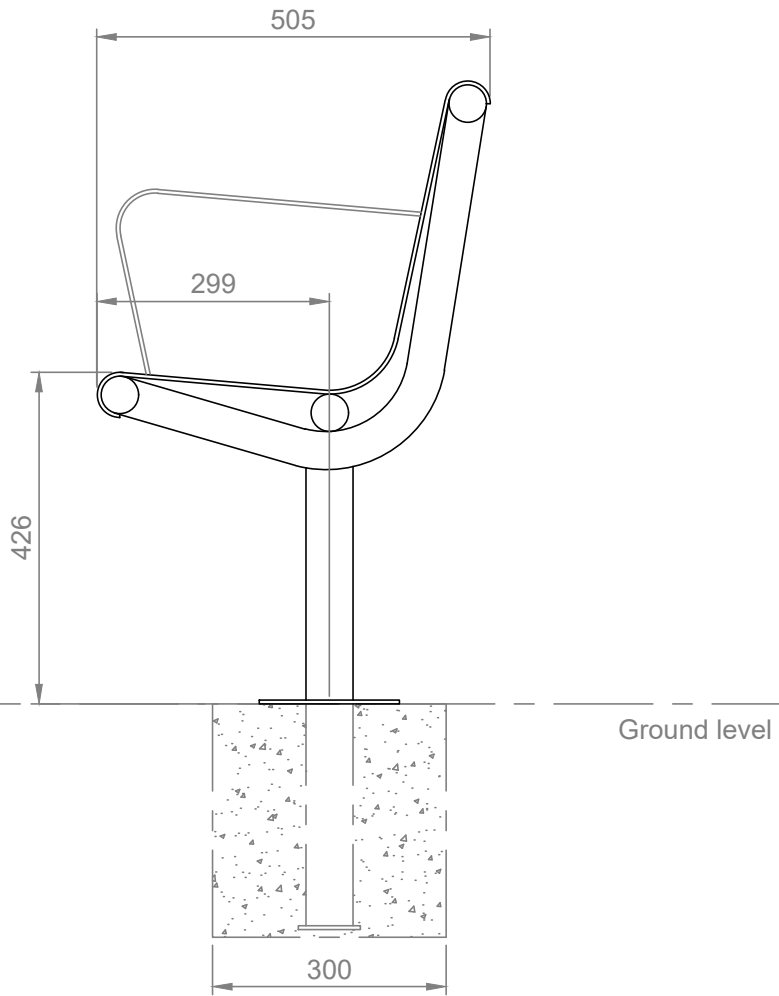

Right view

**INSTALLATION DETAILS (Recommendations only)**


*Concrete footings, 25mPa:*

- Two 300x300x300mm minimum footing size
- Bolt down to footings with 6x M12x75mm Dynabolts or similar
- For extended leg option, set product(s) into footings

or

*Concrete slab, 25mPa:*

- One 1900x600x100mm (minimum) thick slab recommended

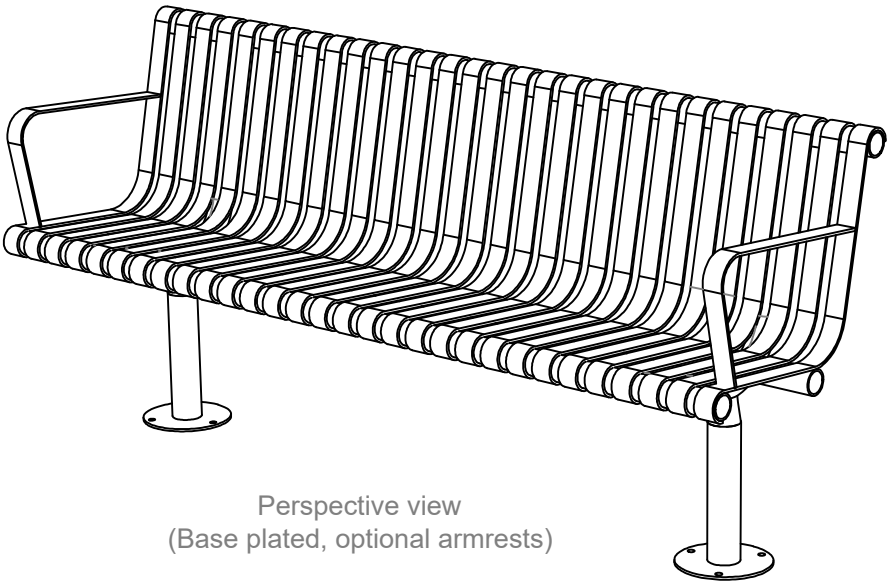

Perspective view  
(Base plated, optional armrests)

**CSA**  
Commercial Systems *Australia Pty. Ltd.*  
42 Orchard St, Kilsyth South, VIC  
phone: (03) 9723 4111  
fax: (03) 9723 3494  
email: design@commercialsystems.com.au

Model Code: HM3020  
Model Description: Steel Slat Seat

**Drawing: CS0108**  
Sheet Number: 1  
Sheet Description: Product overview  
**1800mm**

Drawn By: G.Smith  
Date Drawn: 04.08.2009  
Revision Number: 5

SCALE 1:1

ALL DIMENSIONS IN MILLIMETERS  
UNLESS OTHERWISE STATED  
ALL PARTS CENTRED UNLESS SPECIFIED

TOLERANCES	
X	+/- 1mm
X.X	+/- 0.5mm
X.XX	+/- 0.05mm