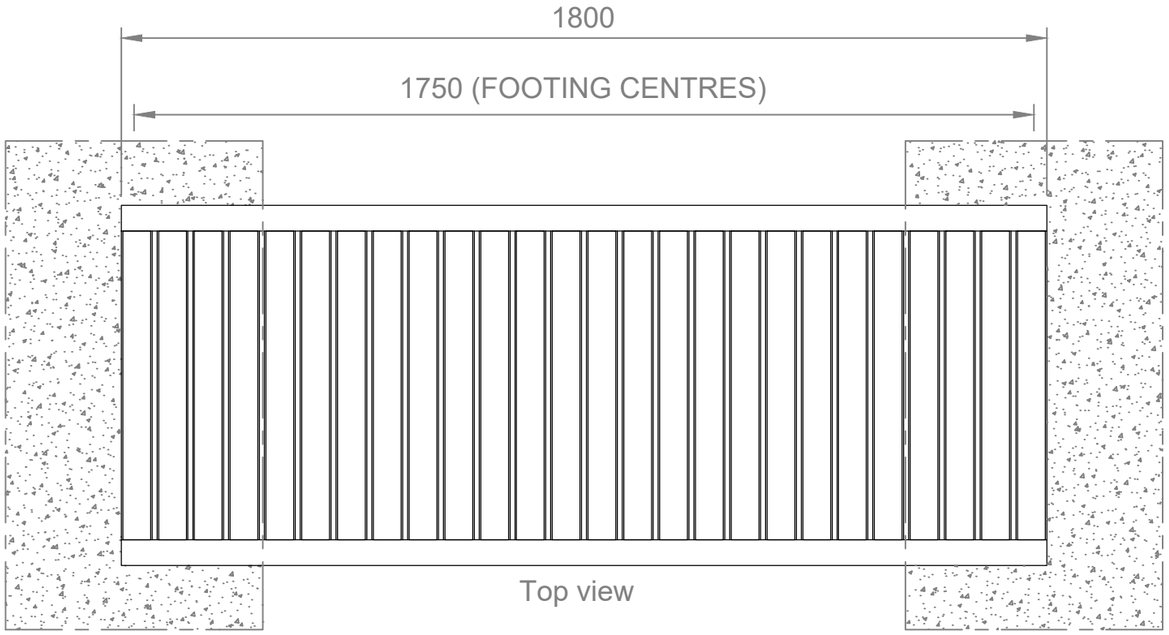

Top view

INSTALLATION DETAILS (Recommendations only)

Concrete footings, 25mPa:

- Two 950x500x500mm minimum footing size
- Bolt down to footings with 4x M12x75mm Dynabolts or similar
- For extended leg option, set product(s) into footings

or

Concrete slab, 25mPa:

- One 1900x800x100mm (minimum) thick slab recommended

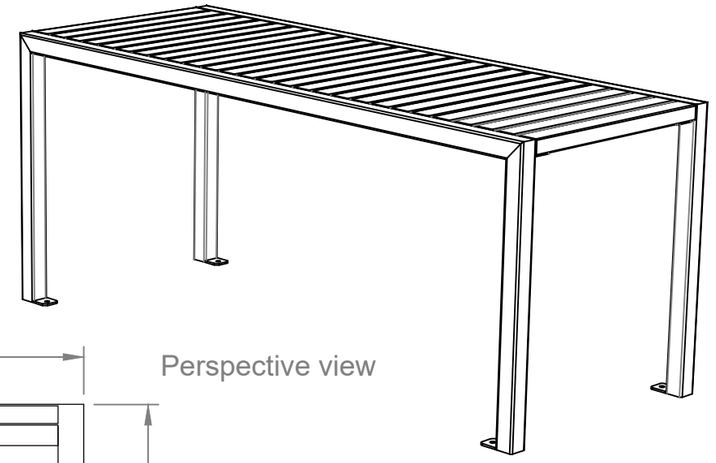

Perspective view

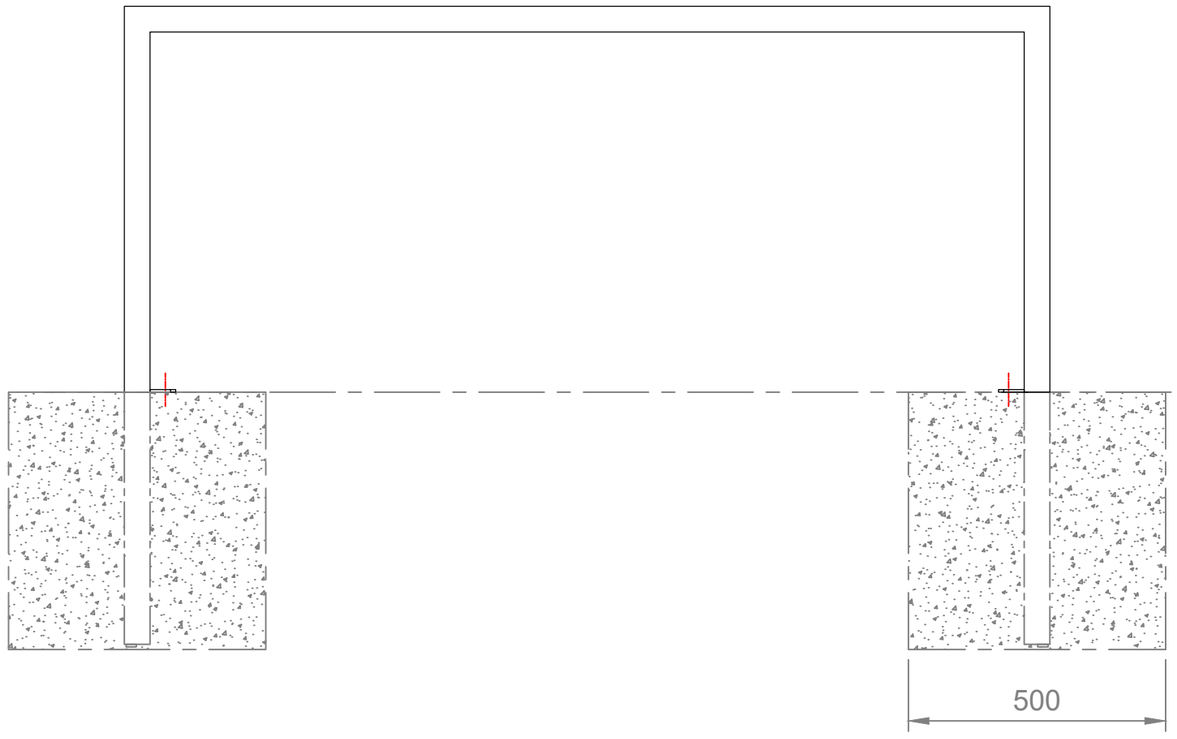

Front view

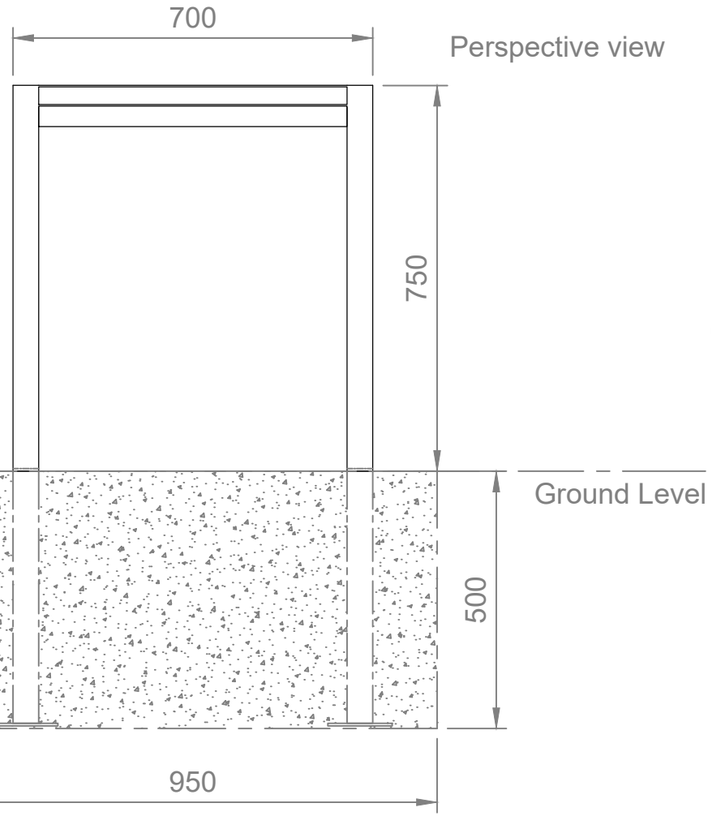

Ground Level

Right View

Commercial Systems *Australia Pty. Ltd.*

42 Orchard St, Kilsyth South, VIC
phone: (03) 9725 9344
fax: (03) 9725 9744
email: design@commercialsystems.com.au

Model Code: TM4624
Model Description: Darwin Table

Drawing: CS3101
Sheet Number: -
Sheet Description: Installation

Drawn By: G.Parker
Date Drawn: 10.11.2016
Revision Number: 0

SCALE 1:1

ALL DIMENSIONS IN MILLIMETERS
UNLESS OTHERWISE STATED
ALL PARTS CENTRED UNLESS SPECIFIED

TOLERANCES	
X	+/- 1mm
X.X	+/- 0.5mm
X.XX	+/- 0.05mm

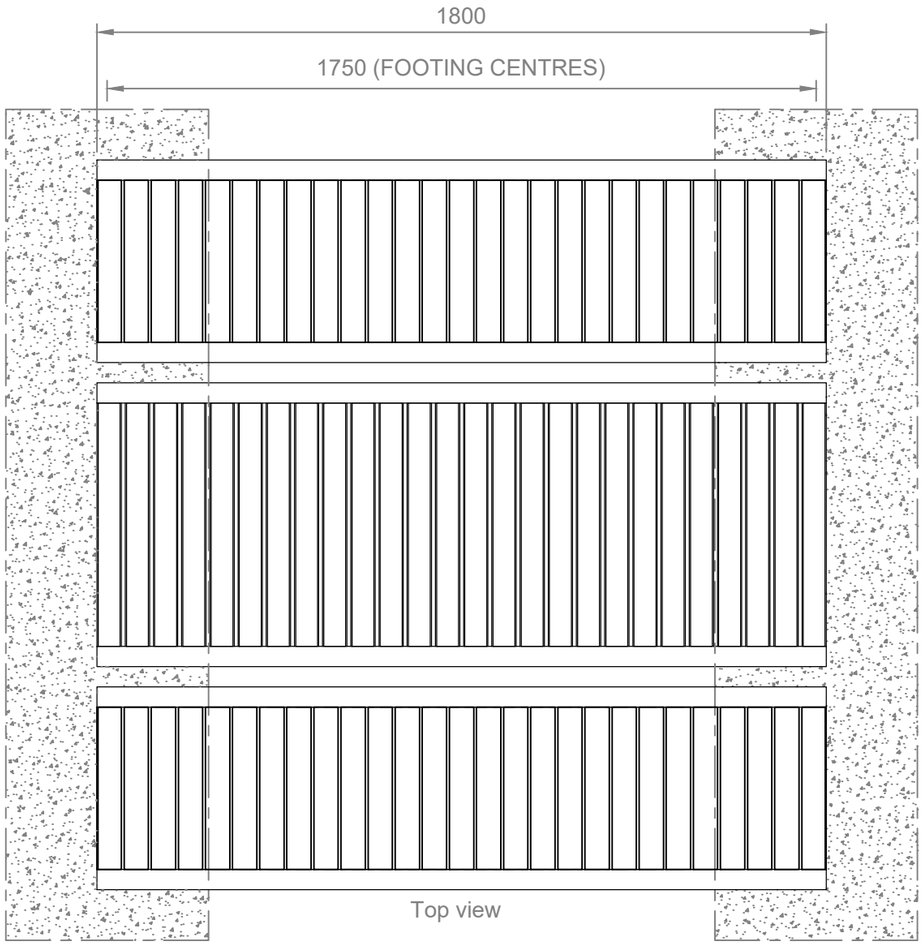

Top view

INSTALLATION DETAILS (Recommendations only)

Concrete footings, 25mPa:

- Two 2050x500x500mm minimum footing size
- Bolt down to footings with 12x M12x75mm Dynabolts or similar
- For extended leg option, set product(s) into footings

or

Concrete slab, 25mPa:

- One 1900x1900x100mm (minimum) thick slab recommended

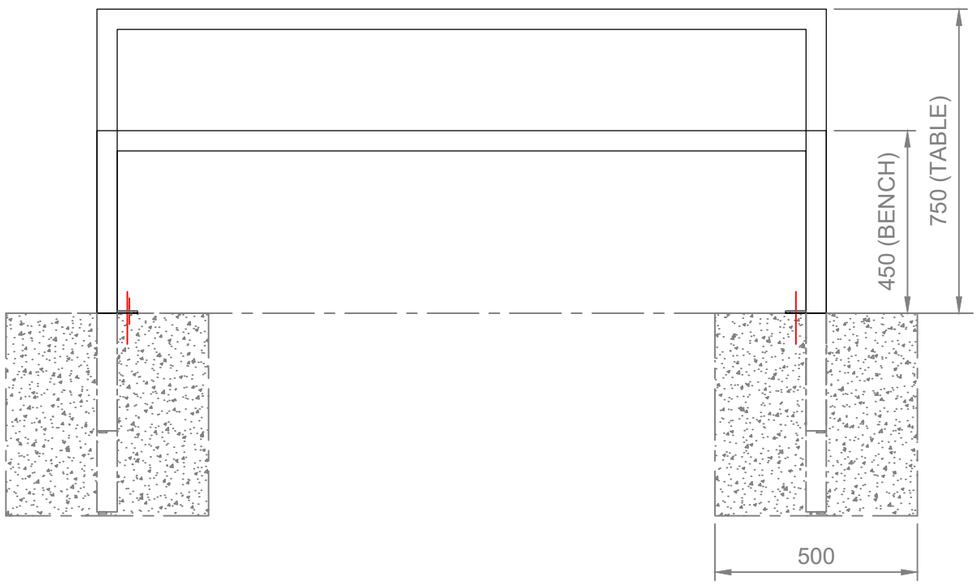

Front view

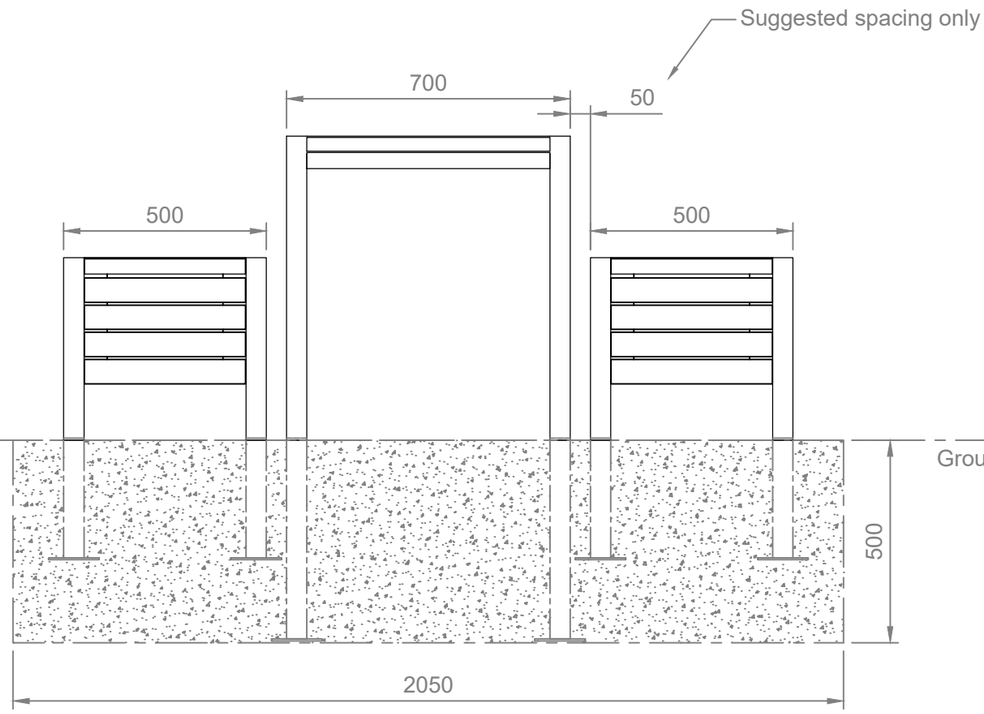

Right View

Commercial Systems *Australia Pty. Ltd.*

42 Orchard St, Kilsyth South, VIC
phone: (03) 9725 9344
fax: (03) 9725 9744
email: design@commercialsystems.com.au

Model Code: TM4624
Model Description: Darwin Table

Drawing: CS3101

Sheet Number: -
Sheet Description: Installation (Setting)

Drawn By: G.Parker
Date Drawn: 10.11.2016
Revision Number: 0

SCALE 1:1

ALL DIMENSIONS IN MILLIMETERS
UNLESS OTHERWISE STATED
ALL PARTS CENTRED UNLESS SPECIFIED

TOLERANCES

X	+/- 1mm
X.X	+/- 0.5mm
X.XX	+/- 0.05mm