
END LEG

ATTACH WITH M10 WASHER, SPRING WASHER, M10X30 SOCKET HEAD SCREWS. 2 SETS PER LEG.
MAKE SURE VERTICAL FACE OF LEG IS TO OUTSIDE OF FRAME.

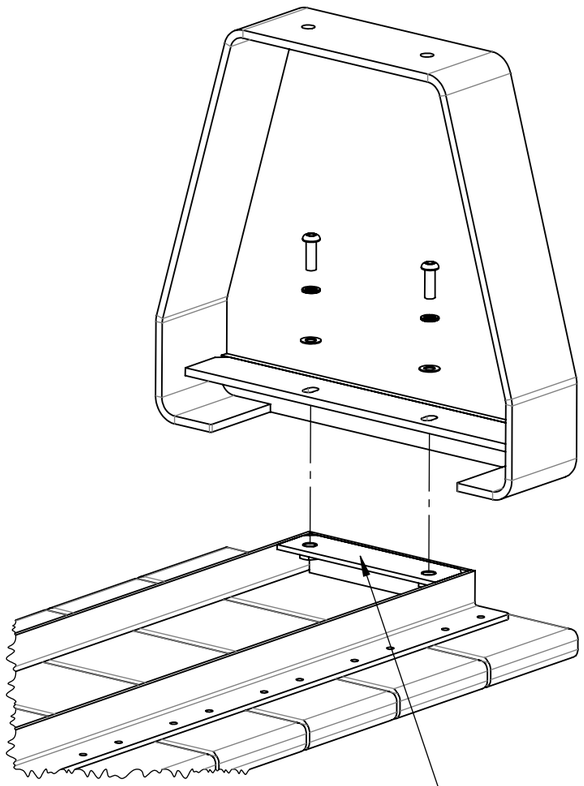


END OF BENCH OR SEAT.
MODULAR SETS WILL HAVE 1 AT EACH END.
CIRCULAR BENCHES WONT HAVE ANY END LEGS.

DETAIL A

CENTRE LEG

ATTACH WITH M10 WASHER, SPRING WASHER, M10X30 SOCKET HEAD SCREWS. 2 SETS PER LEG.
MAKE SURE VERTICAL FACE OF LEG IS TO OUTSIDE OF FRAME.

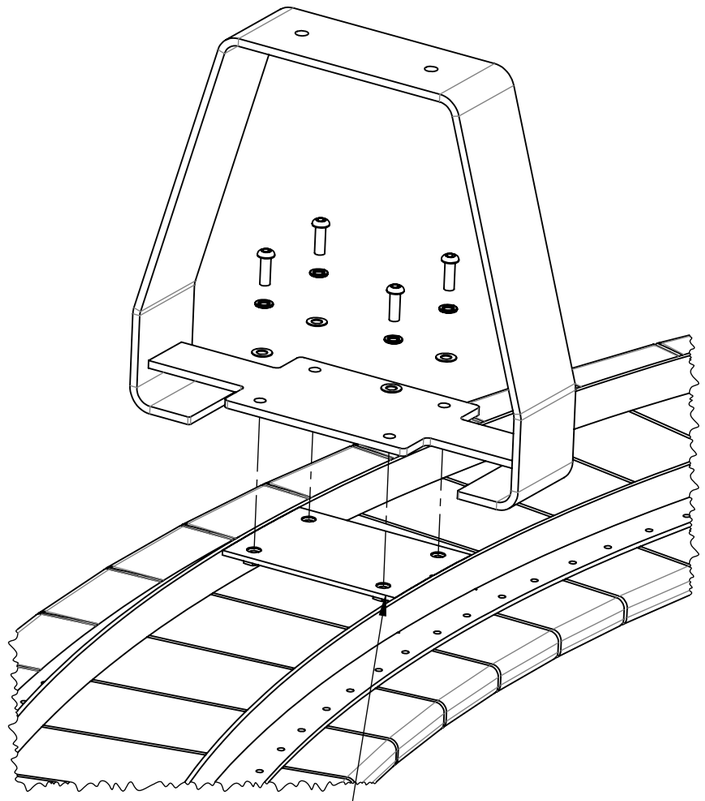


CENTRE PLATE ON LONG BENCH OR SEAT MODULES.

DETAIL B

JOIN LEG - MODULAR SETS

ATTACH WITH M10 WASHER, SPRING WASHER, M10X30 SOCKET HEAD SCREWS. 2 SETS PER LEG.
MAKE SURE VERTICAL FACE OF LEG IS TO OUTSIDE OF FRAME.

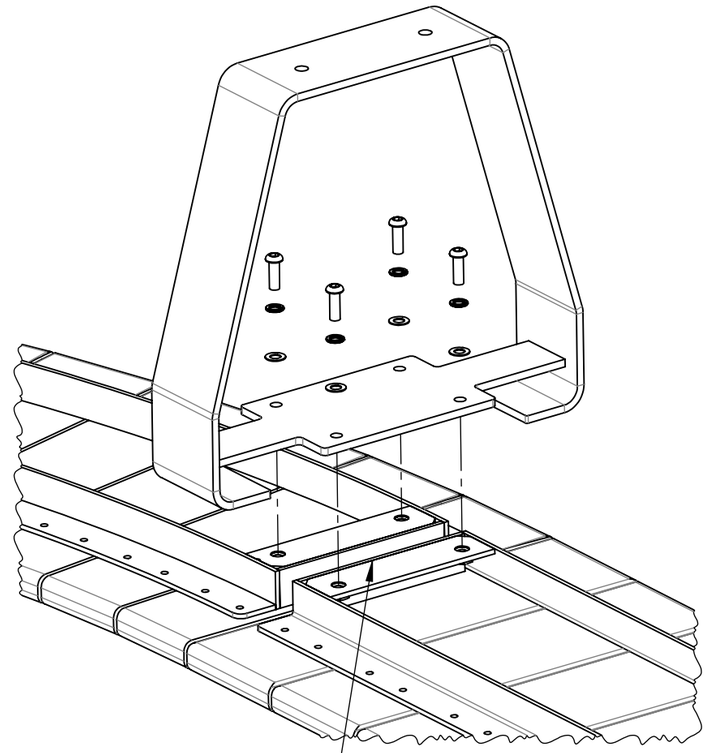

JOINING BENCH OR SEAT MODULES, USE THE L2 LEG TO STRADDLE ENDS OF EACH MODULE.

DETAIL C

Commercial Systems Australia Pty. Ltd.

42 Orchard Street, Kilsyth South, VIC
phone: (03) 9723 4111
fax: (03) 9723 3494
email: design@commercialsystems.com.au

Model Code: TM480x
Model Description:
Voda Leg Installation

Drawing:
Sheet Number: 1
Sheet Description:
Voda Assembly Details

Drawn By: GS
Date Drawn: 17/04/2026
Revision Number: 0

SCALE 1:6

ALL DIMENSIONS IN MILLIMETERS
UNLESS OTHERWISE STATED
ALL PARTS CENTRED UNLESS SPECIFIED

TOLERANCES

X	+/- 1mm
X.X	+/- 0.5mm
X.XX	+/- 0.05mm

FOOTING INFORMATION
CONCRETE SLAB:
RECOMMENDED 125mm THICK WITH SL72 MESH. MINIMUM FURNITURE SIZE +100mm EACH DIRECTION.
INDIVIDUAL FOOTINGS:
BENCHES AND SEATS, ALLOW 300X300X300MM, 25MPA FOOTINGS AT LEG LOCATIONS. REFER TO INDIVIDUAL DRAWINGS
TABLE: ALLOW 500X500X500MM FOOTINGS, 25MPA FOOTINGS AT LEG LOCATIONS, REFER TO INDIVIDUAL DRAWINGS